

Fact Sheet

BIZERBA

iS75 G2

This full-fledged industrial PC is ideally suitable to be used in harsh ambient conditions. The robust multi-touchscreen in stainless steel design provides safe operating convenience in HD quality. The network-capable high-end solution is also impressive in terms of its multi-function: You can reliably control, count and check your production and record data.



More information
High performance
with a wide range of
solutions and options.

Specifications	Facts	Details
Housing	Front	Plastic
	Housing	Stainless steel, 1.4301, electropolished
IP rating	IP65	All-round protection against dust and water
	IP69 (optional)	All-round protection against dust and water, suitable for high pressure / steam-jet cleaning
Ambient temperature	0 °C to +40 °C	Operation
Display	TFT display with LED backlighting	Diagonal: 54.68 cm/21.5"
		Full HD resolution: 1,920 x 1,080 pixels
		16 million colors
Touch screen	Projective capacitive touch (PCT)	– Multi touch operation
		– Anti-shatter film laminated onto entire surface
		– High scratch resistance for use in harsh industrial environments
Processor	Intel® Core™ i5 8365U	1.6 GHz up to 4.1 GHz
Working memory	4 GB	DDR4 SO-DIMM RAM
Data storage	265 GB	C-Fast 3D-TLC-Flash
Operating system	Windows 10 Pro	64 Bit
	Windows 11 pro	64 Bit
	Windows 10 IoT Enterprise LTSC 2021	
		The Microsoft license terms apply: https://www.microsoft.com/en-us/UseTerms/Retail/Windows/10/UseTerms_Retail_Windows_10_English.htm
Interfaces	5 x USB	4 x USB 3.0, one of them outward routed
		1 x USB 3.1 gen 2
	2 x Ethernet	RJ45, 10/100/1000 Mbit
	1 x WLAN	Dual band 2.4/5 GHz
	1 x serial interfaces	1 x RS232 as DSUB-9
Mains supply	1 serial interface, switchable	RS232/442/485 via BIOS as DSUB-9
	100-240 V, 50/60 Hz	

Options	Facts	Details
RFID	RFID USB module	Transmitting frequency: 125 kHz; 13.56 MHz
Extension RAM	2x4 GB	DDR4 SO-DIMM RAM
IP69 kit	Deflector plate for cable lead through	Stainless steel
Device holder	Customer side	via VESA 100
	Foot	Stainless steel
	Column	Stainless steel

	Wall mounting / ceiling mounting	Stainless steel
Industrial software	Formulating, dosing, batching	BRAIN2 Formulation




Symbols



IP65 pro-
tection

IP69 pro-
tection

Dimensional drawings

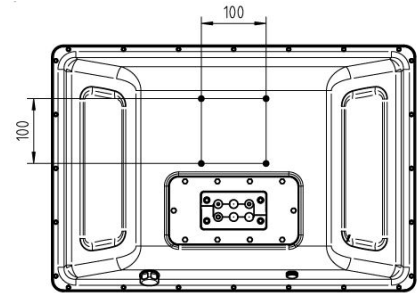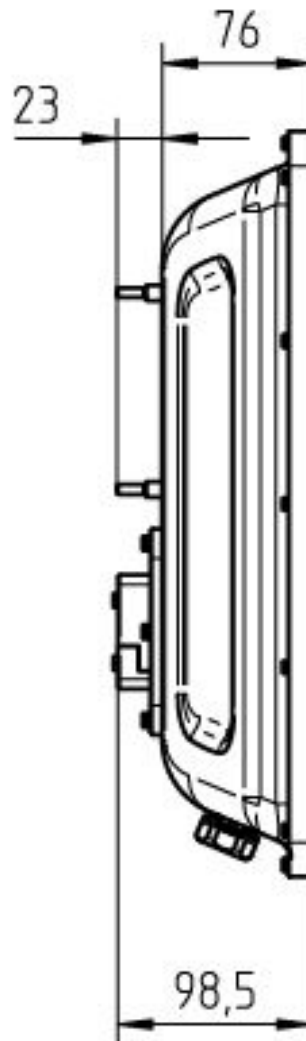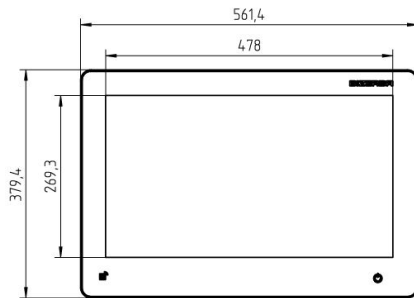

Bizerba SE & Co. KG
Wilhelm-Kraut-Straße 65
72336 Balingen

phone: +49 7433 12-0
fax: +49 7433 12-2696
marketing@bizerba.com

www.bizerba.com