

Fact Sheet

BIZERBA

C2 TM

The new checkout scale generation for your POS: Rely on fast and accurate weighing and pricing operations with the new C2 series.

Simply integrate these scales in your new or existing checkout solution for even greater efficiency, also where space is limited.



More information
High performance
with a wide range of
solutions and options.

Specifications	Facts	Details
Model	C2 TM	
Weighing range scale interval	3/6 kg 12 kg	Scale interval 1/2 g, minimum load 20 g Scale interval 2 g, minimum load 40 g (only Italy)
Minimum load	6/15 kg** 30 lb	Scale interval 2/5 g, minimum load 40 g (standard) Scale interval 0.01 lb, minimum load 0.20 lb
		**Multi-interval strain gauge weighing system
Weighing system	Strain gauge weighing systems (multi interval/single interval)	2x 3000d, 1x 6000d
Unit price increments, smallest unit	0.01	
Unit price digits max.	6	
Selling price increments, smallest unit	0.01	
Selling price digits max.	6	
Zero setting device	Via zero setting key on the P display or via software display	
Interface	USB	Connection to POS system as USB CDC device (Communication Device Class) using virtual COM port
	P display	Connection via RJ45 connector
Cable for connection to the POS system	4 m USB data cable	On POS side: USB-A connector On scale side: Mini USB-B
Communication log	Adjustable data dialog	Bizerba (RBS) Dialog 02 Dialog 06 Dialog 09
Temperature range	-10 °C to +40 °C	
Operating voltage	Separate power supply unit [12 V/1 A], included in scope of delivery	
Power consumption	Without display	0.52 W
	With P display	0.82 W

Options**Display****Facts**

Software display

License for the metrologically approved display of the weighing data on the POS system

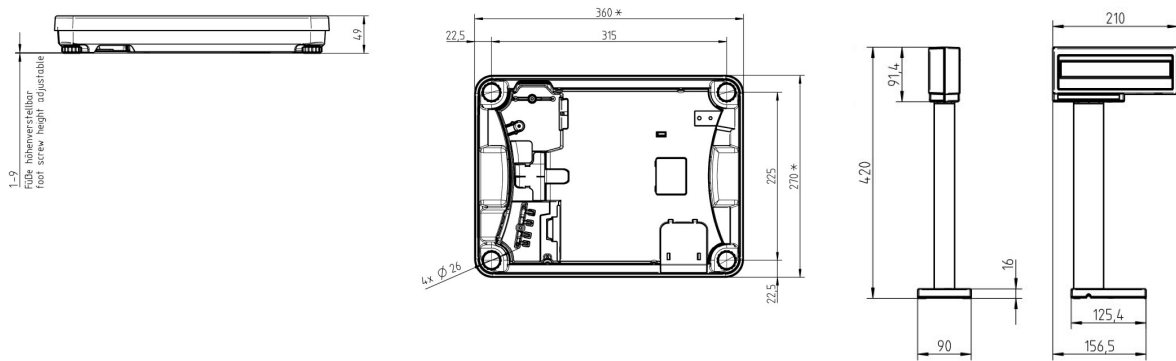
Details

Displaying of weight, unit price, selling price, tare and article text.

P display

Displaying of weight, unit price, selling price, tare

Separate one-sided P display on a stand

Dimensional drawings**Bizerba SE & Co. KG**

Wilhelm-Kraut-Straße 65

72336 Balingen

phone: +49 7433 12-0

fax: +49 7433 12-2696

marketing@bizerba.com

www.bizerba.com